

GUSSDA 固思达
NEEDS OUR PURSUIT



揭阳市恒智精密五金有限公司
JIEYANG HENGZHI PRECISION HARDWARE CO., LTD.

电话: 0663-8811266 传真: 0663-8816266
地址: 广东省揭阳市产业园磐东城西第二工业区

GUSSDA 固思达
NEEDS OUR PURSUIT

SLIDE SERIES

CONCISE AND FASHIONABLE DESIGN, PRACTICAL FUNCTIONS,
COMBINATION OF TECHNIQUE AND ART IS OUR
DEVELOPMENT PURPOSE.

立足现在·心系未来



揭阳市恒智精密五金有限公司
JIEYANG HENGZHI PRECISION HARDWARE CO., LTD.

目录

Content

01· 隐藏欧式三节缓冲滑轨
HIDDEN EUROPEAN THREE SECTION BUFFER SLIDE

02· 隐藏式二节缓冲滑轨
HIDDEN TWO SECTION BUFFER SLIDE

03· 隐藏欧式二节反弹滑轨
HIDDEN EUROPEAN TWO SECTION REBOUND SLIDE

04· 三节钢珠滑轨
THREE SECTION STEEL BALL SLIDE

我们一直 专注好滑轨制造

WE HAVE BEEN
FOCUS ON THE PRODUCTION OF SLIDES

提供优质的滑轨

揭阳市恒智精密五金有限公司是专业生产钢珠滑轨的企业，是目前国内行业中优秀企业之一，并已通过 ISO9001-2000 国际质量体系认证。

本厂在研究、生产进程中，秉承国际五金制作理念，凭借先进现代化设备及杰出设计，专业性的制造和严格的品质检验系统，使产品达到灵活自如，耐磨耐损的卓越品质。

随之全球 WTO 贸易不断扩大，本公司对产品质量追求更加执着，以在竞争浪潮中积累经验不断改进，创新产品，充分满足个行业需求。未来，我们继续开拓国际市场的同时，会坚持品牌家具五金的“创新、分享、共赢”的核心理念。

揭阳市固思达五金制品有限公司凭借对产品质量执着态度，赢得国内外客户及同行一直好评，我们将一如既往地以忠诚信誉与海内外各界同仁携手共创更辉煌明天。

Jieyang Hengzhi Precision Hardware Co., Ltd. is a professional manufacturer of steel ball slide. It is one of the outstanding enterprises in the domestic industry and has passed ISO9001-2000 international quality system certification.

In the research and production process, the factory adheres to the international hardware production concept. With advanced modern equipment and outstanding design, professional manufacturing and strict quality inspection system, the products are flexible and wearable and excellent.

With the continuous expansion of global WTO trade, the company is more persistent in its pursuit of product quality, accumulating experience in the wave of competition, continuously improving and innovating products to fully meet the needs of individual industries. In the future, while we continue to explore the international market, we will adhere to the core concept of "innovation, sharing, and win-win" of brand furniture hardware.

Jieyang Gusida Hardware Products Co., Ltd. has won praises from customers at home and abroad for its persistent attitude towards product quality. We will continue to work together with colleagues from all walks of life at home and abroad to create a more brilliant future.

精湛 工艺

固思达滑轨以精湛的品质赢得广大消费者青睐。选用优质材料制作，生产工艺精细，精心完美的制作，使用抽屉进出拉动轻快静音，不存在任何卡位现象。产品应用广泛，常用于办公室、家庭、厨房等多种场合中。

Gusta slideway wins the favor of consumers with its exquisite quality. It is made of high-quality materials, with fine production technology and elaborate and perfect production. It uses drawers to pull in and out, and it is light and quiet. There is no clamping phenomenon. Products are widely used in office, family, kitchen and other occasions.

优质 材料


严格选用进口材料，保证产品品质的高要求，完善精密的加工生产设备，每道工序严格检验，确保质量。专业的开发队伍，让产品不断更新和创新。

Strict selection of imported materials to ensure high quality requirements of products, improve precision processing and production equipment, strict inspection of each process to ensure quality. Professional development team, so that products continue to update and innovate.

专业 技术

五金产品在家居的功能性方面担当着重要的角色，优质的五金件能提升家具的品质。因此固思达尤其注重质量，创新。以确保每个产品都无可挑剔。在我们员工的专业技能和质量监督的双重管理下，我们总能满足全球技术标准的要求。先进的加工设备和测量设备以及原料到终端产品的严格质量监控保障了我们产品的优秀和品质。

Hardware products play an important role in the functionality of home. High-quality hardware can improve the quality of furniture. So Gusta pays special attention to quality and innovation. To ensure that every product is impeccable. Under the dual management of our staff's professional skills and quality supervision, we can always meet the requirements of global technical standards. Advanced processing equipment and measuring equipment, as well as strict quality control from raw materials to terminal products, ensure the excellence and quality of our products.

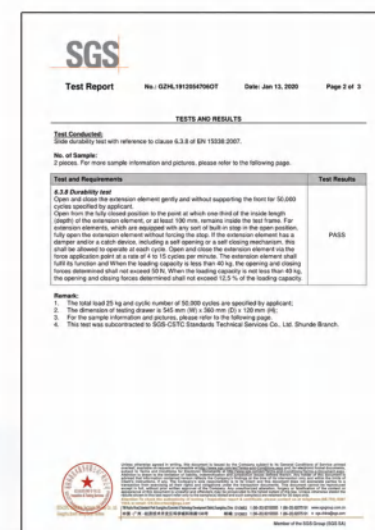

GSD-3200


欧式隐藏三节缓冲滑轨/Concealed three-section buffer rail



前连接件/Front Connector

滑轨安装尺寸

SLIDE RAIL MOUNTING SIZE

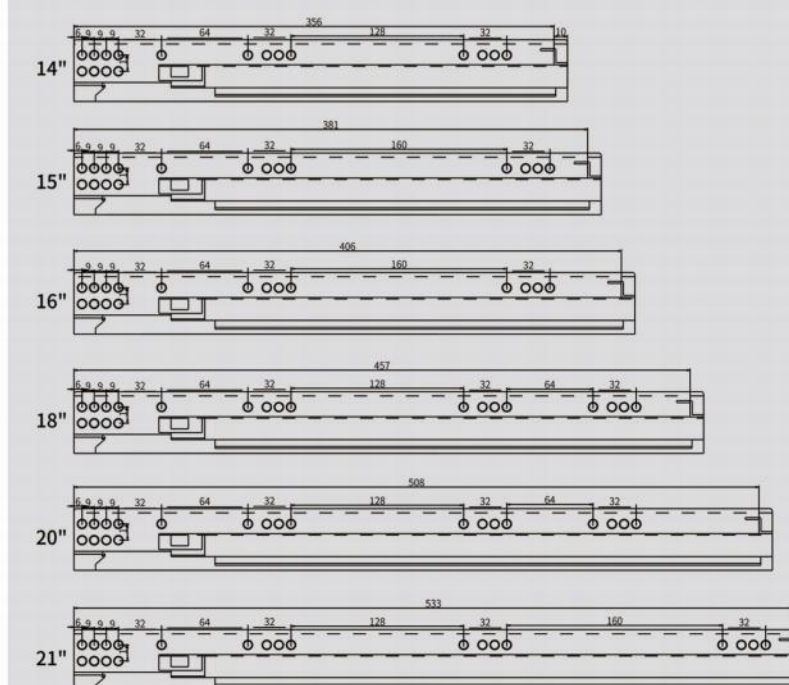

液压缓冲装置

HYDRAULIC BUFFER



可成产的长度: 250mm-600mm

额定负荷: 35kg/18"

使用寿命: 50000次 (正常承重下)

特点: 滑轨为全展出, 滑轨运动顺滑无噪音

抽屉的高度可调节0-3mm

Product length: 250mm-600mm

Rated load: 34kg/18"

Life time: 50,000 times

Features: Full extension, quietly operation
tool-less height adj.(0-3mm)

固思达精致隐藏滑轨·更多舒适体验
GUSTAD EXQUISITE HIDDEN SLIDES · MORE COMFORT EXPERIENCE



隐藏安装



阻尼缓冲

35KG
高承重



超静音

GSD-3200 (BLACK)

欧式隐藏三节缓冲滑轨/Concealed Three-section Buffer Rail



前连接件/FRONT CONNECTOR

滑轨安装尺寸

SLIDE RAIL MOUNTING SIZE



液压缓冲装置

HYDRAULIC BUFFER



可成产的长度：250mm-600mm

额定负荷：35kg/18"

使用寿命：50000次（正常承重下）

特点：滑轨为全展出，滑轨运动顺滑无噪音

抽屉的高度可调节0-3mm

Product length: 250mm-600mm

Rated load: 34kg/18"


Life time: 50,000 times

Features: Full extension, quietly operation
tool-less height adj.(0-3mm)


安装尺寸示意图
Installation Dimension Diagram

W : 柜子内部宽度
L : 抽屉长度
NL : 产品规格长度
DL : 柜子内部深度
X : 面板厚度
W : internal width of Cabinet
L : Drawer length
NL : Product Specification Length
DL : Interior Depth of Cabinet
X : Panel Thickness


抽屉外置安装尺寸
Drawer Outside Installation Dimensions



抽屉内置安装尺寸
Drawer Installation Dimensions



W=柜内宽度 W= Width in Cabinet

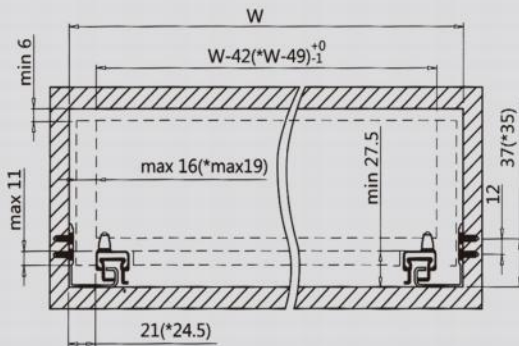


带*为侧板19mm滑轨安装尺寸
Installation Dimension of 19mm
Slide Track with * is Side Plate


安装螺丝要求

Installation screw requirements



平头螺丝
Flat head screw



欧标螺丝
European standard screw



P头螺丝
P-head screw

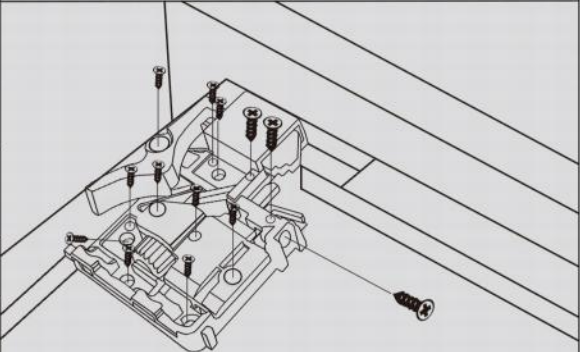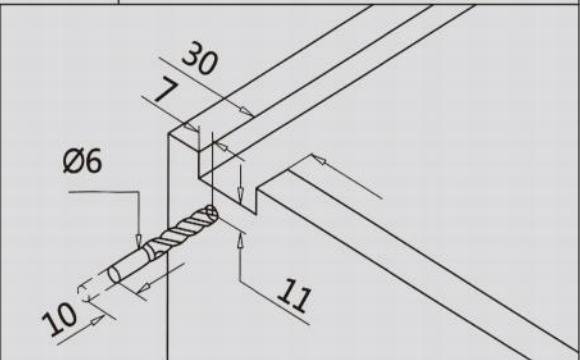

型号 model	滑轨长度 slide length	抽屉长度 (L) drawer length	柜体内部深度 (外置最小) cabinet internal depth (minimum external)	柜体内部深度 (外置最小) cabinet internal depth (minimum external)
GSD3200-250	260	250	275	260+X (面板厚度)
GSD3200-300	310	300	325	310+X (面板厚度)
GSD3200-350	360	350	375	360+X (面板厚度)
GSD3200-400	410	400	425	410+X (面板厚度)
GSD3200-450	460	450	475	460+X (面板厚度)
GSD3200-500	510	500	525	510+X (面板厚度)
GSD3200-550	560	550	575	560+X (面板厚度)

12
PAGE


GSD-3201(调节钉)

欧式隐藏三节缓冲滑轨/Concealed three-section buffer rail



滑轨安装尺寸

SLIDE RAIL MOUNTING SIZE

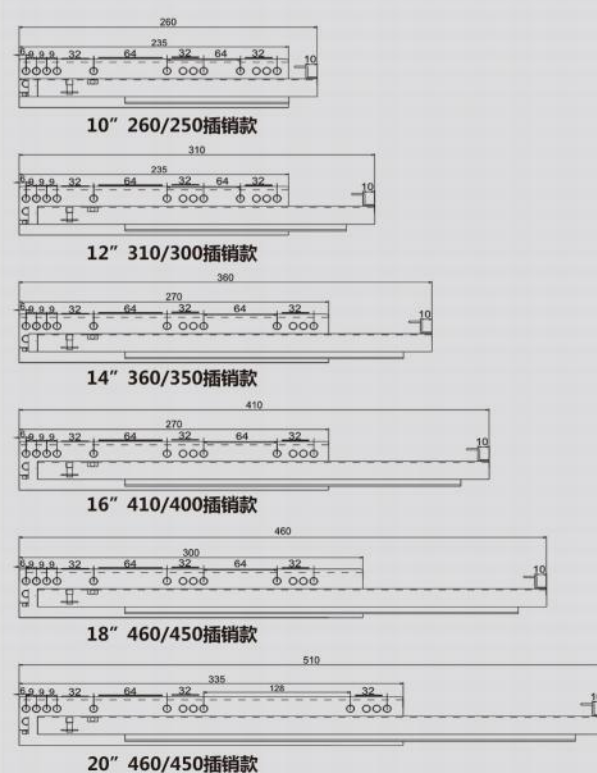

液压缓冲装置

HYDRAULIC BUFFER



可成产的长度：250mm-600mm

额定负荷：35kg/18"

使用寿命：50000次（正常承重下）

特点：滑轨为全展出，滑轨运动顺滑无噪音

抽屉的高度可调节0-3mm

Product length: 250mm-600mm

Rated load: 34kg/18"

Life time: 50,000 times

Features: Full extension, quietly operation
tool-less height adj.(0-3mm)


安装尺寸示意图

Installation Dimension Diagram

W : 柜子内部宽度
 L : 抽屉长度
 NL : 产品规格长度
 DL : 柜子内部深度
 X : 面板厚度
 W : internal width of Cabinet
 L : Drawer length
 NL : Product Specification Length
 DL : Interior Depth of Cabinet
 X : Panel Thickness


抽屉外置安装尺寸

Drawer Outside Installation Dimensions




抽屉内置安装尺寸


Drawer Installation Dimensions



W=柜内宽度 W= Width in Cabinet

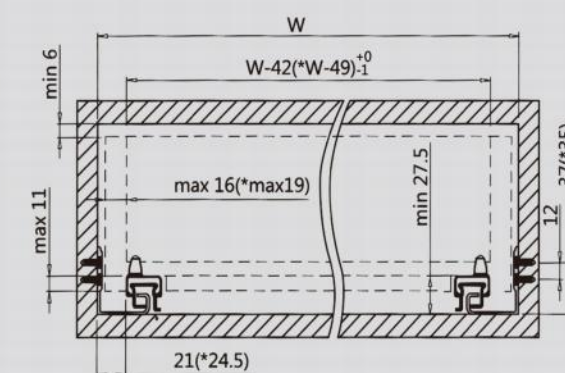

带*为侧板19mm滑轨安装尺寸
Installation Dimension of 19mm
Slide Track with * is Side Plate

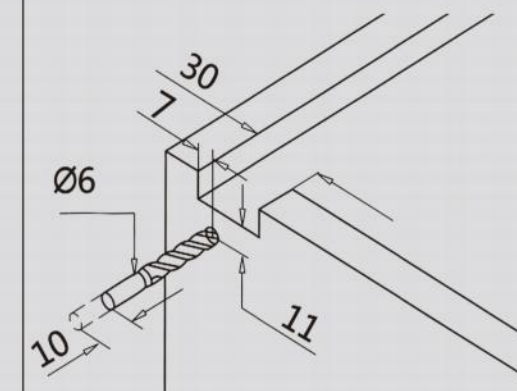

安装螺丝要求

Installation screw requirements

平头螺丝

Flat head screw





欧标螺丝

European standard screw



P头螺丝

P-head screw



型号 model	滑轨长度 slide length	抽屉长度 (L) drawer length	柜体内部深度 (外置最小) cabinet internal depth (minimum external)	柜体内部深度 (外置最小) cabinet internal depth (minimum external)
GSD3201-250	260	250	275	260+X (面板厚度)
GSD3201-300	310	300	325	310+X (面板厚度)
GSD3201-350	360	350	375	360+X (面板厚度)
GSD3201-400	410	400	425	410+X (面板厚度)
GSD3201-450	460	450	475	460+X (面板厚度)
GSD3201-500	510	500	525	510+X (面板厚度)
GSD3201-550	560	550	575	560+X (面板厚度)


GSD-3201

欧式隐藏三节反弹滑轨/European hidden two-section rebound slide



滑轨安装尺寸

SLIDE RAIL MOUNTING SIZE

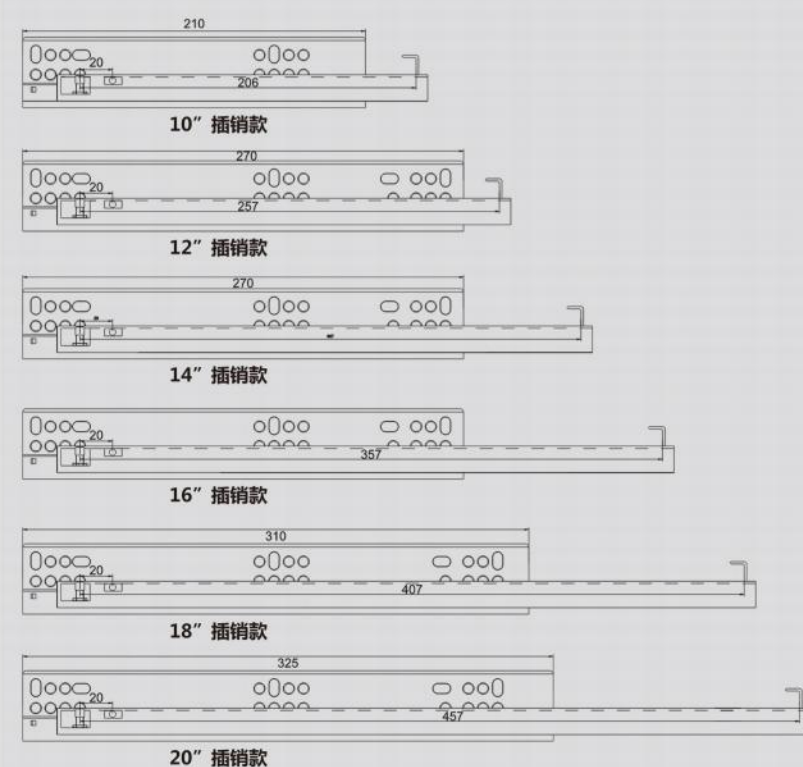

液压缓冲装置

HYDRAULIC BUFFER



可成产的长度：250mm-600mm

额定负荷：35kg/18"

使用寿命：50000次（正常承重下）

特点：滑轨为全展出，滑轨运动顺滑无噪音

抽屉的高度可调节0-3mm

Product length: 250mm-600mm

Rated load: 34kg/18"

Life time: 50,000 times

Features: Full extension, quietly operation
tool-less height adj.(0-3mm)


安装尺寸示意图

Installation Dimension Diagram

W：柜子内部宽度
 L：抽屉长度
 NL：产品规格长度
 DL：柜子内部深度
 X：面板厚度
 W：internal width of Cabinet
 L：Drawer length
 NL：Product Specification Length
 DL：Interior Depth of Cabinet
 X：Panel Thickness


抽屉外置安装尺寸

Drawer Outside Installation Dimensions




抽屉内置安装尺寸


Drawer Installation Dimensions

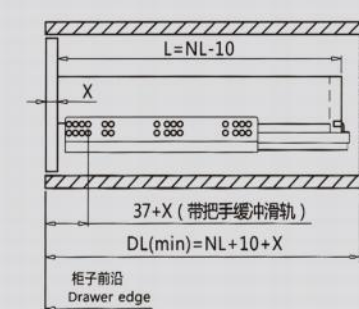

W=柜内宽度 W= Width in Cabinet

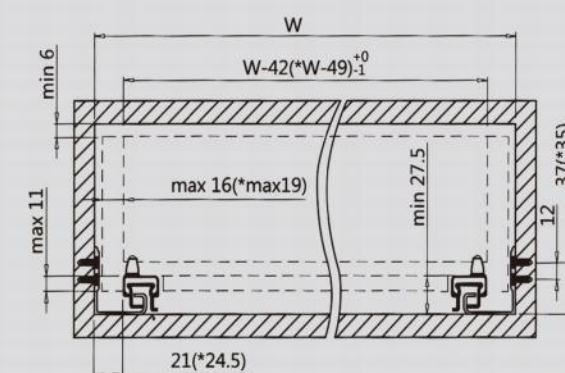


带*为侧板19mm滑轨安装尺寸
Installation Dimension of 19mm
Slide Track with * is Side Plate

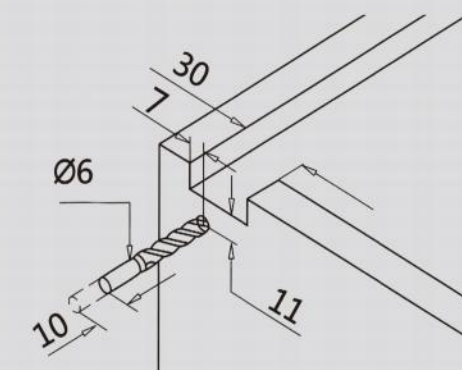


安装螺丝要求

Installation screw requirements

平头螺丝
Flat head screw



欧标螺丝
European standard screw



P头螺丝
P-head screw



型号 model	滑轨长度 slide length	抽屉长度 (L) drawer length	柜体内部深度 (外置最小) cabinet internal depth (minimum external)	柜体内部深度 (外置最小) cabinet internal depth (minimum external)
GSD3201-250	260	250	275	260+X (面板厚度)
GSD3201-300	310	300	325	310+X (面板厚度)
GSD3201-350	360	350	375	360+X (面板厚度)
GSD3201-400	410	400	425	410+X (面板厚度)
GSD3201-450	460	450	475	460+X (面板厚度)
GSD3201-500	510	500	525	510+X (面板厚度)
GSD3201-550	560	550	575	560+X (面板厚度)

GSD-3202(拉篮底装)

12" 14" 16" 18" 隐藏式三节缓冲滑轨/Concealed three-section buffer rail




GSD-3203(拉篮底装)

隐藏式三节缓冲滑轨/Concealed three-section buffer rail



滑轨安装尺寸

SLIDE RAIL MOUNTING SIZE

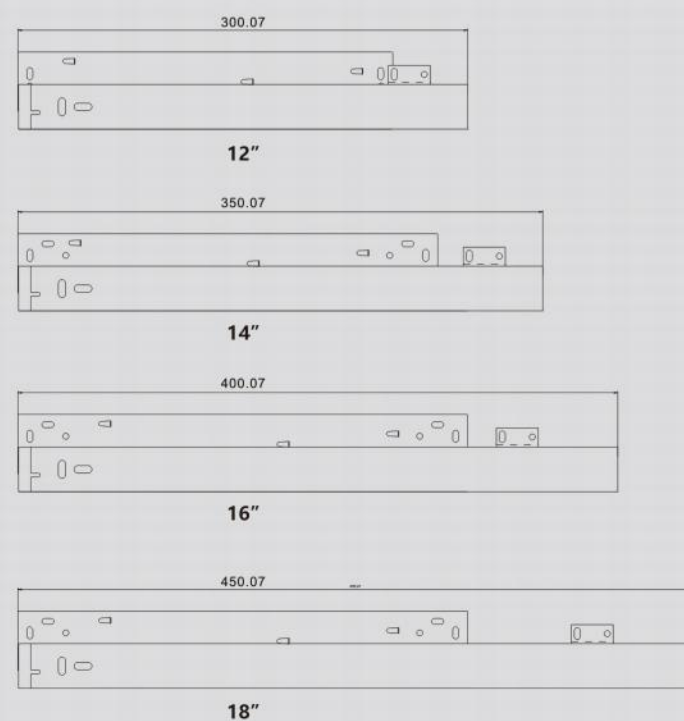

液压缓冲装置

HYDRAULIC BUFFER



可成产的长度: 250mm-600mm

额定负荷: 35kg/18"

使用寿命: 50000次 (正常承重下)

特点: 滑轨为全展出, 滑轨运动顺滑无噪音
抽屉的高度可调节0-3mm

Product length: 250mm-600mm


Rated load: 34kg/18"

Life time: 50,000 times

Features: Full extension, quietly operation
tool-less height adj.(0-3mm)

滑轨安装尺寸

SLIDE RAIL MOUNTING SIZE

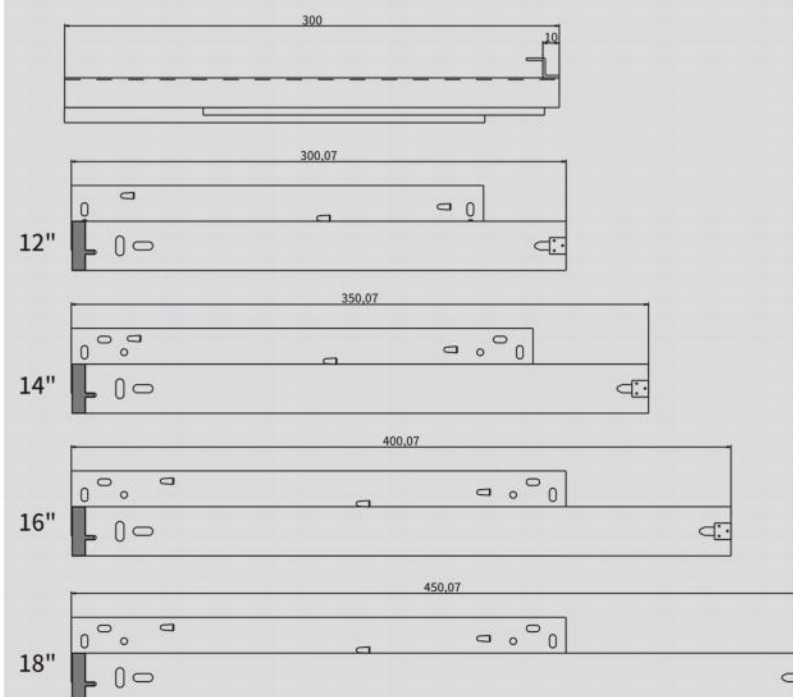

液压缓冲装置

HYDRAULIC BUFFER



可成产的长度: 250mm-600mm

额定负荷: 35kg/18"

使用寿命: 50000次 (正常承重下)

特点: 滑轨为全展出, 滑轨运动顺滑无噪音
抽屉的高度可调节0-3mm

Product length: 250mm-600mm

Rated load: 34kg/18"

Life time: 50,000 times

Features: Full extension, quietly operation
tool-less height adj.(0-3mm)


GSD-3204

隐藏式三节缓冲滑轨/Concealed Three-section Buffer Rail



滑轨安装尺寸

SLIDE RAIL MOUNTING SIZE

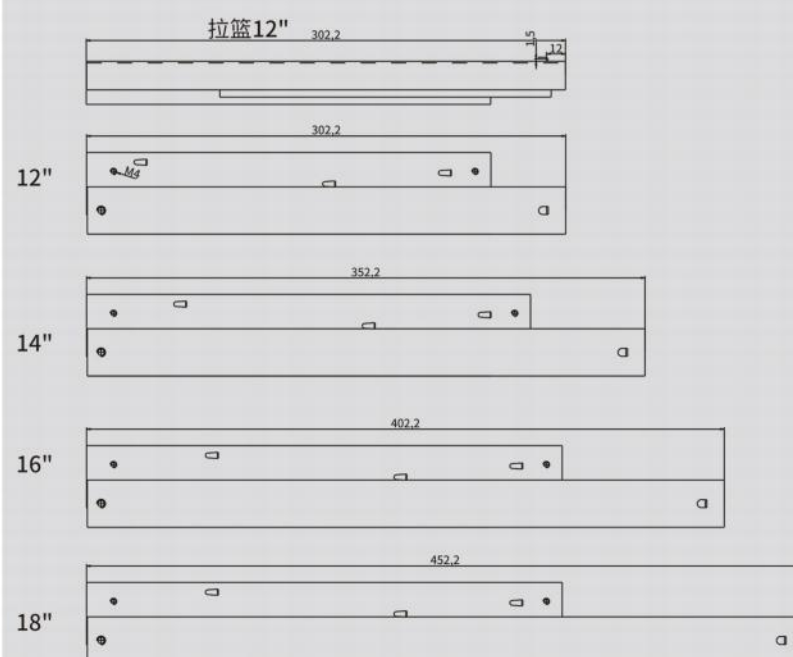

液压缓冲装置

HYDRAULIC BUFFER



可成产的长度: 250mm-600mm

额定负荷: 35kg/18"

使用寿命: 50000次 (正常承重下)

特点: 滑轨为全展出, 滑轨运动顺滑无噪音
抽屉的高度可调节0-3mm

Product length: 250mm-600mm

Rated load: 34kg/18"

Life time: 50,000 times

Features: Full extension, quietly operation
tool-less height adj.(0-3mm)

精选优质材料, 结构更结实, 长久耐用

SELECTED HIGH-QUALITY MATERIALS, FIRMER STRUCTURE
AND LONG-LASTING DURABILITY






GSD-2180(调节钉全拉)

隐藏式二节缓冲滑轨/Concealed two-section buffer rail



滑轨安装尺寸

SLIDE RAIL MOUNTING SIZE

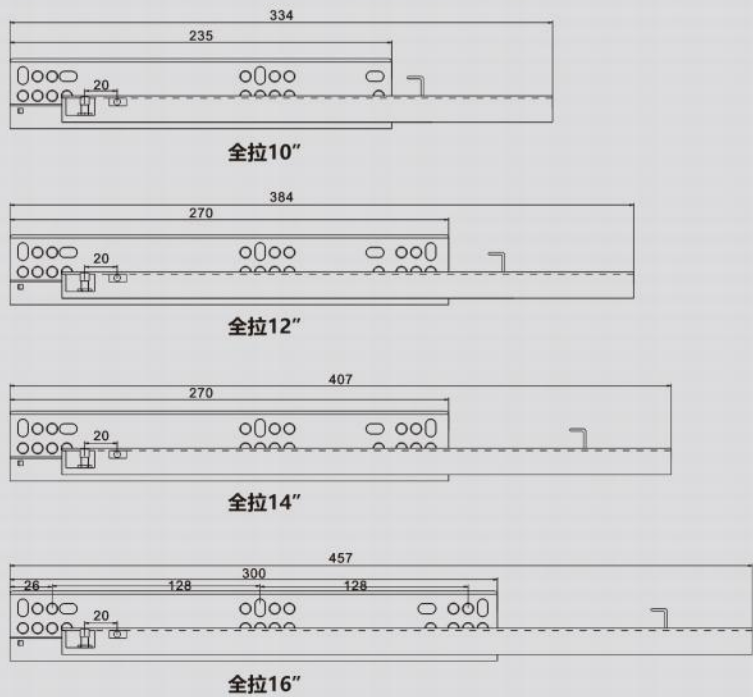

液压缓冲装置

HYDRAULIC BUFFER



可成产的长度：250mm-550mm

额定负荷：25kg/18"

使用寿命：50000次（正常承重下）

特点：滑轨为全展出，滑轨运动顺滑无噪音

抽屉的高度可调节0-3mm

Product length: 250mm-550mm

Rated load: 25kg/18"

Life time: 50,000 times

Features: single extension, quietly operation
tool-less height adj.(0-3mm)


安装尺寸示意图

Installation Dimension Diagram


W：柜子内部宽度
L：抽屉长度
NL：产品规格长度
DL：柜子内部深度
X：面板厚度
W：internal width of Cabinet
L：Drawer length
NL：Product Specification Length
DL：Interior Depth of Cabinet
X：Panel Thickness

抽屉外置安装尺寸


Drawer Outside Installation Dimensions



W=柜内宽度 W= Width in Cabinet

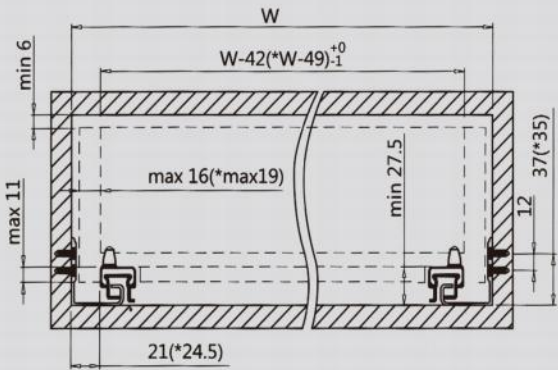

带*为侧板19mm滑轨安装尺寸
Installation Dimension of 19mm
Slide Track with * is Side Plate

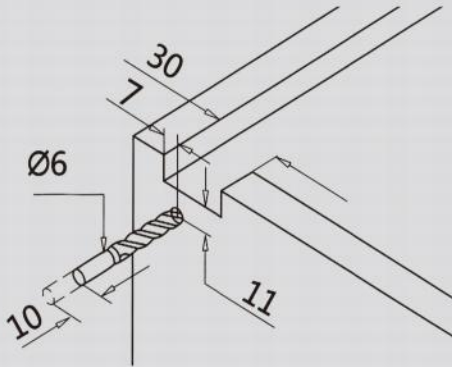



安装螺丝要求

Installation screw requirements

平头螺丝
Flat head screw

欧标螺丝
European standard screw

P头螺丝
P-head screw



型号 model	滑轨长度 slide length	抽屉长度 (L) drawer length	柜体内部深度 (外置最小) cabinet internal depth (minimum external)	柜体内部深度 (外置最小) cabinet internal depth (minimum external)
GSD2180-250	340	250	350	260+X (面板厚度)
GSD2180-300	380	300	395	310+X (面板厚度)
GSD2180-350	420	350	440	360+X (面板厚度)
GSD2180-400	460	400	485	410+X (面板厚度)
GSD2180-450	500	450	530	460+X (面板厚度)
GSD2180-500	540	500	575	510+X (面板厚度)
GSD2180-550	580	550	620	560+X (面板厚度)


GSD-2181(把手)

隐藏式二节缓冲滑轨/Concealed two-section buffer rail



滑轨安装尺寸

SLIDE RAIL MOUNTING SIZE

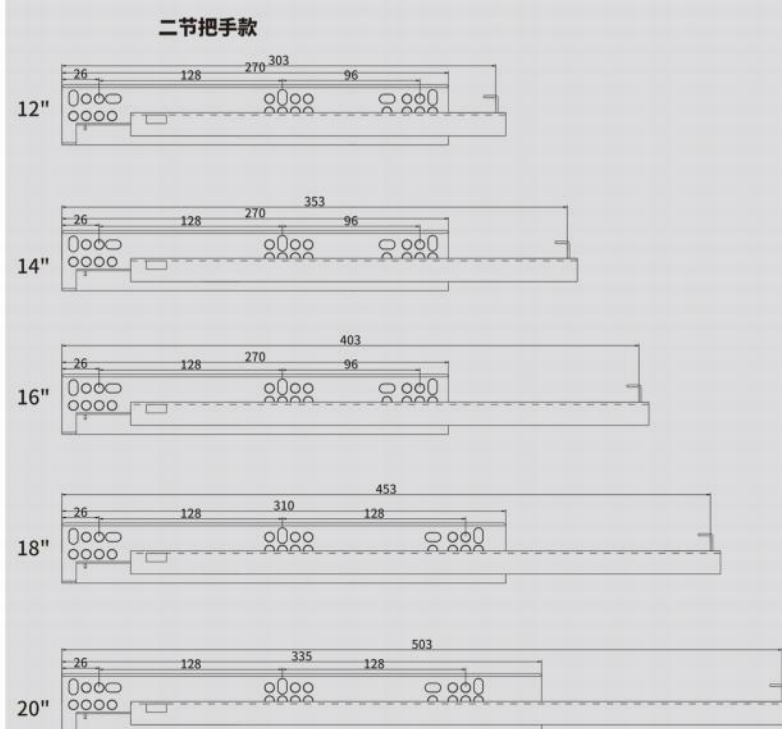

液压缓冲装置

HYDRAULIC BUFFER



可成产的长度: 250mm-600mm

额定负荷: 25kg/18"

使用寿命: 50000次 (正常承重下)

特点: 滑轨为全展出, 滑轨运动顺滑无噪音

抽屉的高度可调节0-3mm

Product length: 250mm-600mm

Rated load: 25kg/18"

Life time: 50,000 times

Features: single extension, quietly operation
tool-less height adj.(0-3mm)


安装尺寸示意图

Installation Dimension Diagram

W: 柜子内部宽度
L: 抽屉长度
NL: 产品规格长度
DL: 柜子内部深度
X: 面板厚度
W: internal width of Cabinet
L: Drawer length
NL: Product Specification Length
DL: Interior Depth of Cabinet
X: Panel Thickness

抽屉外置安装尺寸

Drawer Outside Installation Dimensions




抽屉内置安装尺寸

Drawer Installation Dimensions



W=柜内宽度 W= Width in Cabinet

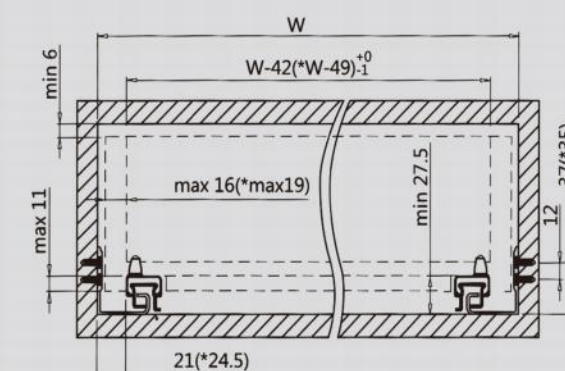

带*为侧板19mm滑轨安装尺寸
Installation Dimension of 19mm
Slide Track with * is Side Plate

安装螺丝要求

Installation screw requirements

平头螺丝 Flat head screw	欧标螺丝 European standard screw	P头螺丝 P-head screw

型号 model	滑轨长度 slide length	抽屉长度 (L) drawer length	柜体内部深度 (外置最小) cabinet internal depth (minimum external)	柜体内部深度 (外置最小) cabinet internal depth (minimum external)
GSD2181-250	250	240	260	260+X (面板厚度)
GSD2181-300	300	290	310	310+X (面板厚度)
GSD2181-350	350	340	360	360+X (面板厚度)
GSD2181-400	400	390	410	410+X (面板厚度)
GSD2181-450	450	440	460	460+X (面板厚度)
GSD2181-500	500	490	510	510+X (面板厚度)
GSD2181-550	550	540	560	560+X (面板厚度)




GSD-2182(调节)

隐藏式二节缓冲滑轨/Concealed two-section buffer rail



滑轨安装尺寸
SLIDE RAIL MOUNTING SIZE

液压缓冲装置
HYDRAULIC BUFFER

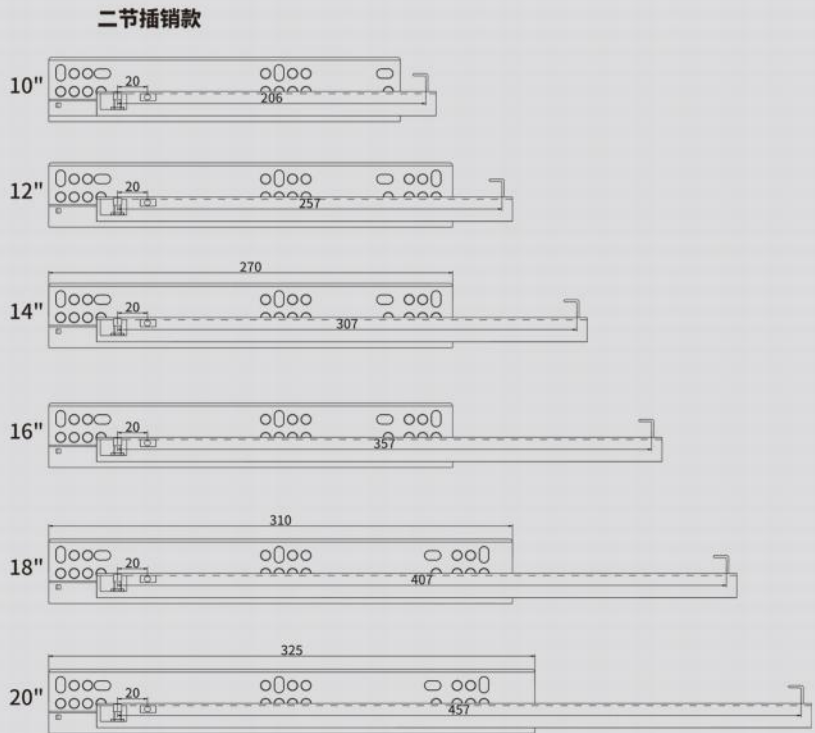


可成产的长度：250mm-600mm
额定负荷：25kg/18"
使用寿命：50000次（正常承重下）
特点：滑轨为全展出，滑轨运动顺滑无噪音
抽屉的高度可调节0-3mm
Product length: 250mm-600mm
Rated load: 25kg/18"
Life time: 50,000 times
Features: single extension, quietly operation
tool-less height adj.(0-3mm)

安装尺寸示意图 Installation Dimension Diagram	抽屉外置安装尺寸 Drawer Outside Installation Dimensions	抽屉内置安装尺寸 Drawer Installation Dimensions
W：柜子内部宽度 L：抽屉长度 NL：产品规格长度 DL：柜子内部深度 X：面板厚度 W：internal width of Cabinet L：Drawer length NL：Product Specification Length DL：Interior Depth of Cabinet X：Panel Thickness		
W=柜内宽度 W= Width in Cabinet 带*为侧板19mm滑轨安装尺寸 Installation Dimension of 19mm Slide Track with * is Side Plate		
安装螺丝要求 Installation screw requirements		
平头螺丝 Flat head screw	欧标螺丝 European standard screw	P头螺丝 P-head screw

型号 model	滑轨长度 slide length	抽屉长度 (L) drawer length	柜体内部深度 (外置最小) cabinet internal depth (minimum external)	柜体内部深度 (外置最小) cabinet internal depth (minimum external)
GSD2182-250	260	250	270	260+X (面板厚度)
GSD2182-300	310	300	320	310+X (面板厚度)
GSD2182-350	360	350	370	360+X (面板厚度)
GSD2182-400	410	400	420	410+X (面板厚度)
GSD2182-450	460	450	470	460+X (面板厚度)
GSD2182-500	510	500	520	510+X (面板厚度)
GSD2182-550	560	550	570	560+X (面板厚度)

GSD-2182(美式三节隐藏)


隐藏式三节缓冲滑轨/Concealed three-section buffer rail

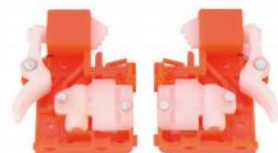

前连接件/Front Connector


滑轨安装尺寸

SLIDE RAIL MOUNTING SIZE

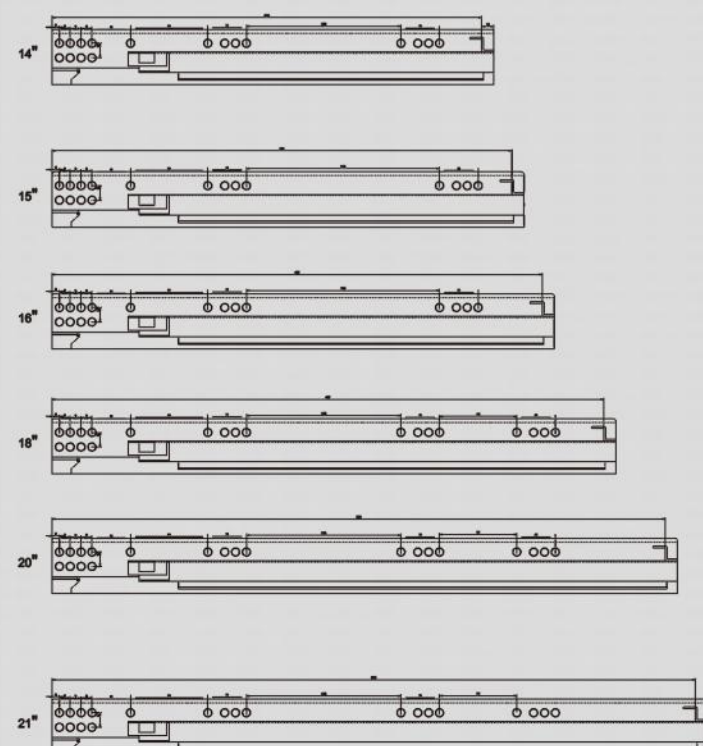

液压缓冲装置

HYDRAULIC BUFFER

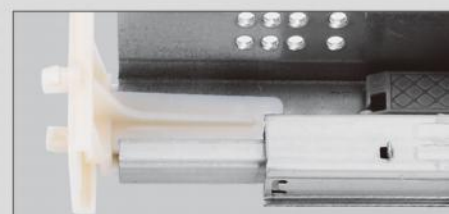

可成产的长度: 250mm-600mm

额定负荷: 35kg/18"

使用寿命: 50000次 (正常承重下)

特点: 滑轨为全展出, 滑轨运动顺滑无噪音

抽屉的高度可调节0-3mm

Product length: 250mm-600mm

Rated load: 35kg/18"


Life time: 50,000 times

Features: Full extension, quietly operation
tool-less height adj.(0-3mm)

安装尺寸示意图
Installation Dimension Diagram

W: 柜子内部宽度
L: 抽屉长度
NL: 产品规格长度
DL: 柜子内部深度
X: 面板厚度
W: internal width of Cabinet
L: Drawer length
NL: Product Specification Length
DL: Interior Depth of Cabinet
X: Panel Thickness


抽屉外置安装尺寸
Drawer Outside Installation Dimensions




抽屉内置安装尺寸
Drawer Installation Dimensions



W=柜内宽度 W= Width in Cabinet

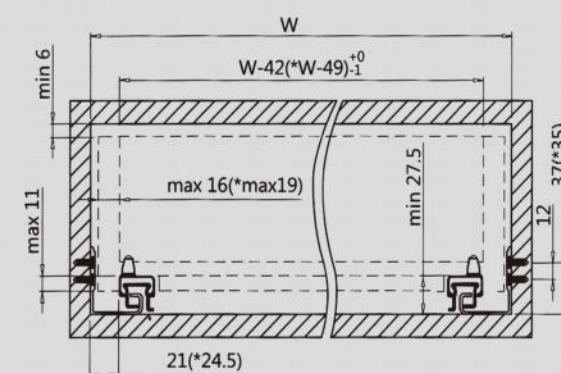


带*为侧板19mm滑轨安装尺寸
Installation Dimension of 19mm
Slide Track with * is Side Plate

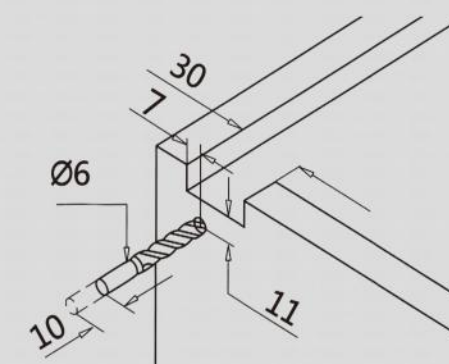


安装螺丝要求
Installation screw requirements

平头螺丝
Flat head screw



欧标螺丝
European standard screw



P头螺丝
P-head screw



型号 model	滑轨长度 slide length	抽屉长度 (L) drawer length	柜体内部深度 (外置最小) cabinet internal depth (minimum external)	柜体内部深度 (外置最小) cabinet internal depth (minimum external)
GSD2182-250	260	250	270	260+X (面板厚度)
GSD2182-300	310	300	320	310+X (面板厚度)
GSD2182-350	360	350	370	360+X (面板厚度)
GSD2182-400	410	400	420	410+X (面板厚度)
GSD2182-450	460	450	470	460+X (面板厚度)
GSD2182-500	510	500	520	510+X (面板厚度)
GSD2182-550	560	550	570	560+X (面板厚度)

GSD-4515

三节钢珠阻尼滑轨/Three-section Steel Ball Damping Slide



GSD-4515


三节钢珠滑轨/Three ball bearing slide



加强型珠架
Enhanced bead frame



塑料缓冲
Plastic buffer

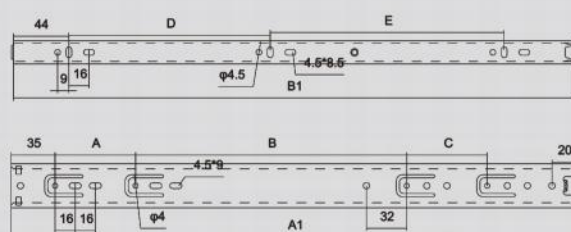


SIZE	A1	B1	A	B	C	D	E
GSD45-10"	250	247	64	96		96	96
GSD45-12"	300	297	64	64	64	96	128
GSD45-14"	350	347	64	96	64	128	128
GSD45-16"	400	397	64	160	64	160	160
GSD45-18"	450	447	64	192	64	160	192
GSD45-20"	500	497	64	256	64	192	192
GSD45-22"	550	547	64	288	64	224	224
GSD45-24"	600	597	64	352	64	256	256

滑轨宽度: 45mm
规格: 10"-24"
建议用途: 办公用具、厨具及家用抽屉
产品特点: "32mm" 系列孔位, 带可分离松脱阀
安装方式: 侧面安装
安装要求: 间隙26-27mm
表面处理: 镀蓝锌, 彩锌, 黑锌
材料: 冷轧钢板

Rail width: 45mm
Specifications: 10 "-24"
Recommended use: office supplies, kitchenware and home drawers
Features: "32mm" series of holes, with detachable release valve
Installation: side mounted
Installation requirements: Clearance 26-27
Finish: blue zinc plated, color zinc, black zinc
Material: cold-rolled steel

材料厚度
 The thickness of the material


NO.	①	②	③
A	1.2 x 1.2 x 1.5mm		
B	1.2 x 1.2 x 1.2mm		



加强型珠架
Enhanced bead frame



耐高温防冻塑胶
High-temperature plastic antifreeze

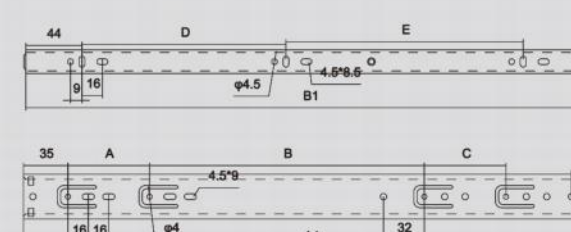


SIZE	A1	B1	A	B	C	D	E
GSD45-10"	250	247	64	96		96	96
GSD45-12"	300	297	64	64	64	96	128
GSD45-14"	350	347	64	96	64	128	128
GSD45-16"	400	397	64	160	64	160	160
GSD45-18"	450	447	64	192	64	160	192
GSD45-20"	500	497	64	256	64	192	192
GSD45-22"	550	547	64	288	64	224	224
GSD45-24"	600	597	64	352	64	256	256

滑轨宽度: 45mm
规格: 10"-24"
建议用途: 办公用具、厨具及家用抽屉
产品特点: "32mm" 系列孔位, 带可分离松脱阀
安装方式: 侧面安装
安装要求: 间隙26-27mm
表面处理: 镀蓝锌, 彩锌, 黑锌
材料: 冷轧钢板

Rail width: 45mm
Specifications: 10 "-24"
Recommended use: office supplies, kitchenware and home drawers
Features: "32mm" series of holes, with detachable release valve
Installation: side mounted
Installation requirements: Clearance 26-27
Finish: blue zinc plated, color zinc, black zinc
Material: cold-rolled steel

材料厚度
 The thickness of the material

NO.	①	②	③
A	1.2 x 1.2 x 1.5mm		
B	1.2 x 1.2 x 1.2mm		



GSD-4515圆边

三节钢珠滑轨/Three ball bearing slide



GSD-4512


三节钢珠滑轨/Three ball bearing slide



加强型珠架
Enhanced bead frame



耐高温防冻塑胶
High-temperature plastic antifreeze

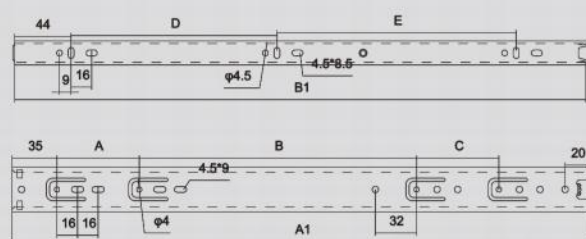

SIZE	A1	B1	A	B	C	D	E
GSD45-10"	250	247	64	96		96	96
GSD45-12"	300	297	64	64	64	96	128
GSD45-14"	350	347	64	96	64	128	128
GSD45-16"	400	397	64	160	64	160	160
GSD45-18"	450	447	64	192	64	160	192
GSD45-20"	500	497	64	256	64	192	192
GSD45-22"	550	547	64	288	64	224	224
GSD45-24"	600	597	64	352	64	256	256

滑轨宽度: 45mm

规格: 10"-24"

建议用途: 办公用具、厨具及家用抽屉

产品特点: "32mm" 系列孔位, 带可分离松脱阀

安装方式: 侧面安装

安装要求: 间隙26-27mm

表面处理: 镀蓝锌, 彩锌, 黑锌

材料: 冷轧钢板

Rail width: 45mm

Specifications: 10"-24"

Recommended use: office supplies, kitchenware and home drawers

Features: "32mm" series of holes, with detachable release valve

Installation: side mounted

Installation requirements: Clearance 26-27

Finish: blue zinc plated, color zinc, black zinc

Material: cold-rolled steel


材料厚度

The thickness of the material

NO. ① ② ③

A 1.2 x 1.2 x 1.5mm


B 1.2 x 1.2 x 1.2mm



加强型珠架
Enhanced bead frame



耐高温防冻塑胶
High-temperature plastic antifreeze

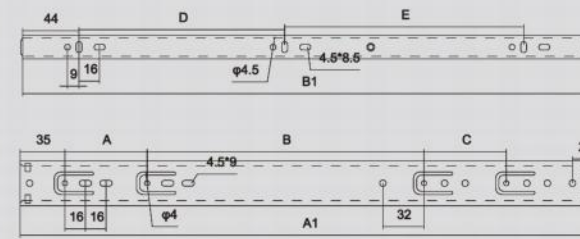

SIZE	A1	B1	A	B	C	D	E
GSD45-10"	250	247	64	96		96	96
GSD45-12"	300	297	64	64	64	96	128
GSD45-14"	350	347	64	96	64	128	128
GSD45-16"	400	397	64	160	64	160	160
GSD45-18"	450	447	64	192	64	160	192
GSD45-20"	500	497	64	256	64	192	192
GSD45-22"	550	547	64	288	64	224	224
GSD45-24"	600	597	64	352	64	256	256

滑轨宽度: 45mm

规格: 10"-24"

建议用途: 办公用具、厨具及家用抽屉

产品特点: "32mm" 系列孔位, 带可分离松脱阀

安装方式: 侧面安装

安装要求: 间隙26-27mm

表面处理: 镀蓝锌, 彩锌, 黑锌

材料: 冷轧钢板

Rail width: 45mm

Specifications: 10"-24"

Recommended use: office supplies, kitchenware and home drawers

Features: "32mm" series of holes, with detachable release valve

Installation: side mounted

Installation requirements: Clearance 26-27

Finish: blue zinc plated, color zinc, black zinc


Material: cold-rolled steel

材料厚度

The thickness of the material

NO. ① ② ③

A 1.0 x 1.0 x 1.2mm



GSD-4511


三节钢珠滑轨/Three ball bearing slide



加强型珠架
Enhanced bead frame



耐高温防冻塑胶
High-temperature plastic antifreeze

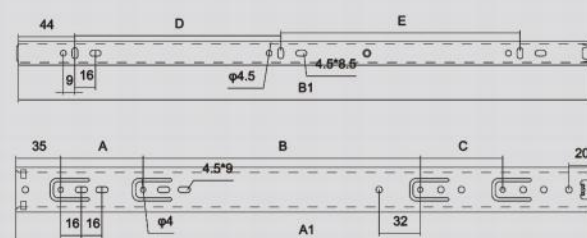

SIZE	A1	B1	A	B	C	D	E
GSD45-10"	250	247	64	96		96	96
GSD45-12"	300	297	64	64	64	96	128
GSD45-14"	350	347	64	96	64	128	128
GSD45-16"	400	397	64	160	64	160	160
GSD45-18"	450	447	64	192	64	160	192
GSD45-20"	500	497	64	256	64	192	192
GSD45-22"	550	547	64	288	64	224	224
GSD45-24"	600	597	64	352	64	256	256

滑轨宽度: 45mm

规格: 10"-24"

建议用途: 办公用具、厨具及家用抽屉

产品特点: "32mm" 系列孔位, 带可分离松脱阀

安装方式: 侧面安装

安装要求: 间隙26-27mm

表面处理: 镀蓝锌, 彩锌, 黑锌

材料: 冷轧钢板

Rail width: 45mm

Specifications: 10 "-24"

Recommended use: office supplies, kitchenware and home drawers

Features: "32mm" series of holes, with detachable release valve

Installation: side mounted

Installation requirements: Clearance 26-27

Finish: blue zinc plated, color zinc, black zinc


Material: cold-rolled steel

材料厚度

The thickness of the material

NO. ① ② ③

A 1.0 x 1.0 x 1.2mm



GSD-4513


三节钢珠滑轨/Three ball bearing slide



加强型珠架
Enhanced bead frame



耐高温防冻塑胶
High-temperature plastic antifreeze

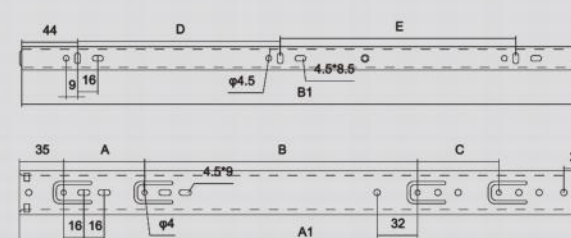

SIZE	A1	B1	A	B	C	D	E
GSD45-10"	250	247	64	96		96	96
GSD45-12"	300	297	64	64	64	96	128
GSD45-14"	350	347	64	96	64	128	128
GSD45-16"	400	397	64	160	64	160	160
GSD45-18"	450	447	64	192	64	160	192
GSD45-20"	500	497	64	256	64	192	192
GSD45-22"	550	547	64	288	64	224	224
GSD45-24"	600	597	64	352	64	256	256

滑轨宽度: 45mm

规格: 10"-24"

建议用途: 办公用具、厨具及家用抽屉

产品特点: "32mm" 系列孔位, 带可分离松脱阀

安装方式: 侧面安装

安装要求: 间隙26-27mm

表面处理: 镀蓝锌, 彩锌, 黑锌

材料: 冷轧钢板

Rail width: 45mm

Specifications: 10 "-24"

Recommended use: office supplies, kitchenware and home drawers

Features: "32mm" series of holes, with detachable release valve

Installation: side mounted

Installation requirements: Clearance 26-27

Finish: blue zinc plated, color zinc, black zinc


Material: cold-rolled steel

材料厚度

The thickness of the material

NO. ① ② ③

A 1.0 x 1.0 x 1.2mm



GSD-4209


三节钢珠滑轨/Three ball bearing slide



加强型珠架
Enhanced bead frame



耐高温防冻塑胶
High-temperature plastic antifreeze

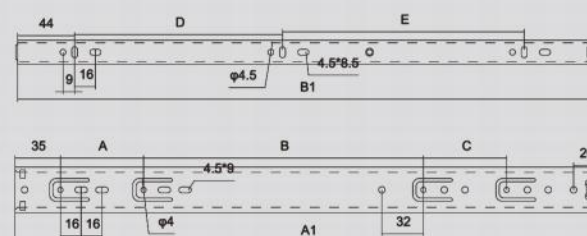

SIZE	A1	B1	A	B	C	D	E
GSD45-10"	250	247	64	96		96	96
GSD45-12"	300	297	64	64	64	96	128
GSD45-14"	350	347	64	96	64	128	128
GSD45-16"	400	397	64	160	64	160	160
GSD45-18"	450	447	64	192	64	160	192
GSD45-20"	500	497	64	256	64	192	192
GSD45-22"	550	547	64	288	64	224	224
GSD45-24"	600	597	64	352	64	256	256

滑轨宽度: 42mm

规格: 10"-24"

建议用途: 办公用具、厨具及家用抽屉

产品特点: "32mm" 系列孔位, 带可分离松脱阀

安装方式: 侧面安装

表面处理: 镀蓝锌, 彩锌, 黑锌

材料: 冷轧钢板

Rail width: 42mm

Specifications: 10 "-24"

Recommended use: office supplies, kitchenware and home drawers

Features: "32mm" series of holes, with detachable release valve

Installation: side mounted

Finish: blue zinc plated, color zinc, black zinc

Material: cold-rolled steel


材料厚度

The thickness of the material

NO. ① ② ③

A 0.9 x 0.9 x 0.9mm

B 1.0 x 1.0 x 1.0mm



GSD-3610


三节钢珠滑轨/Three ball bearing slide



加强型珠架
Enhanced bead frame



耐高温防冻塑胶
High-temperature plastic antifreeze

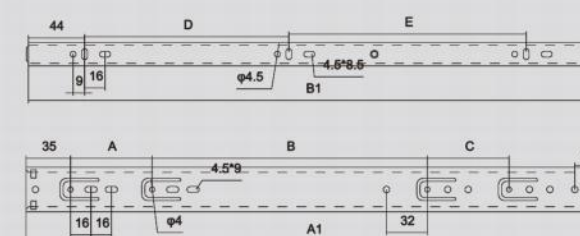

SIZE	A1	B1	A	B	C	D	E
GSD36-10"	250	247	64	96		96	96
GSD36-12"	300	297	64	64	64	96	128
GSD36-14"	350	347	64	96	64	128	128
GSD36-16"	400	397	64	160	64	160	160
GSD36-18"	450	447	64	192	64	160	192
GSD36-20"	500	497	64	256	64	192	192
GSD36-22"	550	547	64	288	64	224	224
GSD36-24"	600	597	64	352	64	256	256

滑轨宽度: 36mm

规格: 10"-24"

建议用途: 办公用具、厨具及家用抽屉

产品特点: "32mm" 系列孔位, 带可分离松脱阀

安装方式: 侧面安装

表面处理: 镀蓝锌, 彩锌, 黑锌

材料: 冷轧钢板

Rail width: 36mm

Specifications: 10 "-24"

Recommended use: office supplies, kitchenware and home drawers

Features: "32mm" series of holes, with detachable release valve

Installation: side mounted

Finish: blue zinc plated, color zinc, black zinc

Material: cold-rolled steel


材料厚度

The thickness of the material

NO. ① ② ③

A 1.0 x 1.0 x 1.0mm

B 0.9 x 0.9 x 0.9mm




GSD-218

欧式隐藏二节反弹滑轨/European hidden three-section rebound slide



滑轨安装尺寸

SLIDE RAIL MOUNTING SIZE

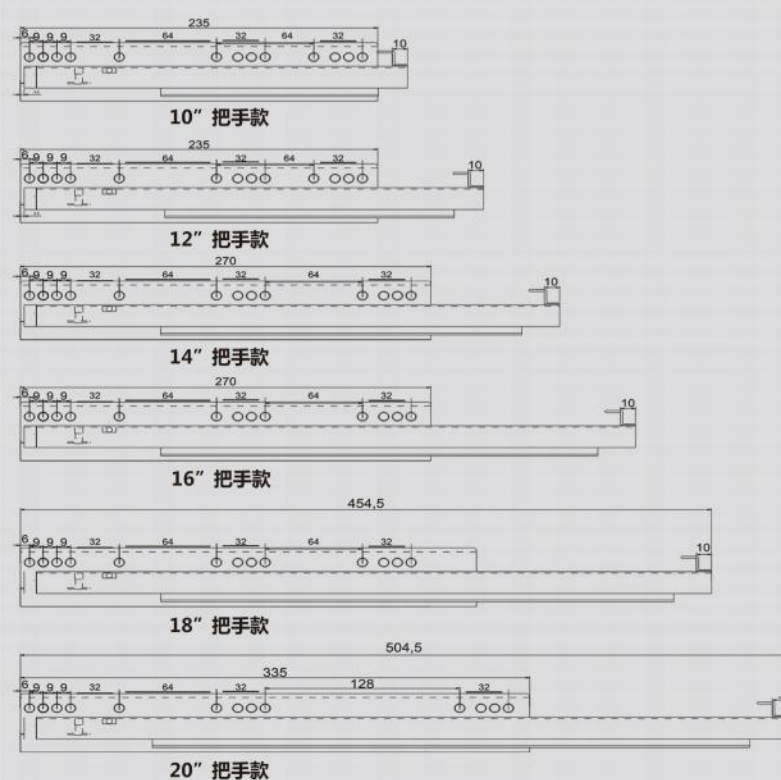

液压缓冲装置

HYDRAULIC BUFFER



可成产的长度：250mm-600mm

额定负荷：25kg

使用寿命：50000次（正常承重下）

特点：滑轨为全展出，滑轨运动顺滑无噪音

抽屉的高度可调节0-3mm

Product length: 250mm-600mm

Rated load: 25kg

Life time: 50,000 times

Features: Full extension, quietly operation
tool-less height adj.(0-3mm)


安装尺寸示意图

Installation Dimension Diagram

W：柜内宽度
L：抽屉长度
NL：产品规格长度
DL：柜内深度
X：面板厚度
W：internal width of Cabinet
L：Drawer length
NL：Product Specification Length
DL：Interior Depth of Cabinet
X：Panel Thickness


抽屉外置安装尺寸

Drawer Outside Installation Dimensions




抽屉内置安装尺寸


Drawer Installation Dimensions

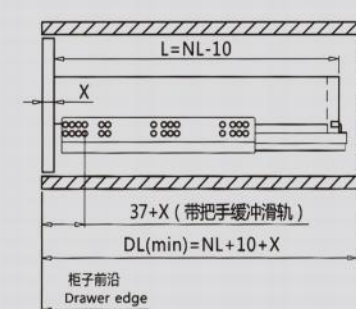

W=柜内宽度 W= Width in Cabinet

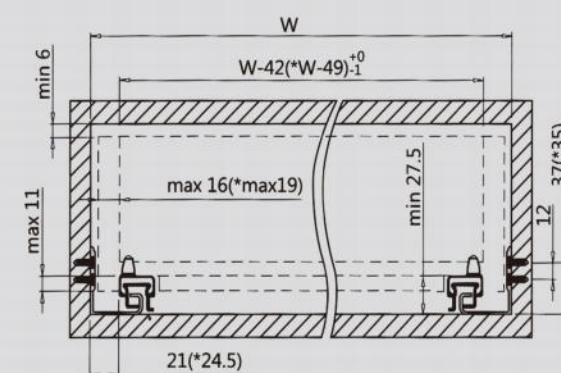


带*为侧板19mm滑轨安装尺寸
Installation Dimension of 19mm
Slide Track with * is Side Plate

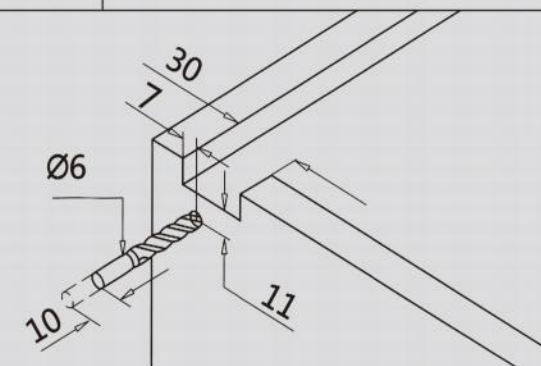


安装螺丝要求

Installation screw requirements

平头螺丝
Flat head screw



欧标螺丝
European standard screw



P头螺丝
P-head screw



型号 model	滑轨长度 slide length	抽屉长度 (L) drawer length	柜体内部深度 (外置最小) cabinet internal depth (minimum external)	柜体内部深度 (外置最小) cabinet internal depth (minimum external)
GSD3201-250	260	250	275	260+X (面板厚度)
GSD3201-300	310	300	325	310+X (面板厚度)
GSD3201-350	360	350	375	360+X (面板厚度)
GSD3201-400	410	400	425	410+X (面板厚度)
GSD3201-450	460	450	475	460+X (面板厚度)
GSD3201-500	510	500	525	510+X (面板厚度)
GSD3201-550	560	550	575	560+X (面板厚度)



GSD-2709/2710


二节钢珠滑轨/Two steel ball slides



加强型珠架
Enhanced bead frame



耐高温防冻塑胶
High-temperature plastic antifreeze

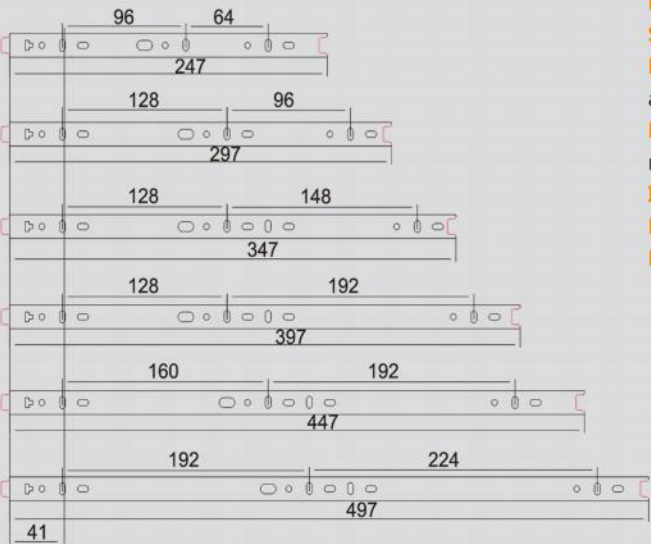

滑轨宽度: 27mm
规格: 10"-24"
建议用途: 办公用具、厨具及家用抽屉
产品特点: "32mm" 系列孔位, 带可分离松脱阀
安装方式: 侧面安装
表面处理: 镀蓝锌, 彩锌, 黑锌
材料: 冷轧钢板

Rail width: 27mm
Specifications: 10 "-24"
Recommended use: office supplies, kitchenware and home drawers
Features: "32mm" series of holes, with detachable release valve
Installation: side mounted
Finish: blue zinc plated, color zinc, black zinc
Material: cold-rolled steel

材料厚度
The thickness of the material

NO.	①	②
A	1.0 x 1.0	
B	0.9 x 0.9	

